

KEGENERATOR


KegMaster Pro

Specifications




Internal Number	500.00.000.00-XX
Part Number	KM-PRO
Electrical network, V/Hz	115/60
Dedicated Circuit, A	15
Plug type (NEMA #)	5-15P ⚡
Compressor Power, HP	1/7
Power consumption, W	205
Operating amperage, A	2.5
Internal volume, l	214
Net volume, l	188
Refrigerant	R290
The temperature in the inner volume, °F	28 - 37
Width, in	23.6
Depth, in	31
Height, in	39.2
Height of the column, in	57.6
Net Weight, lb	141.1
Power cord length, ft	7
Operating ambient temperature, °F	50 - 90
Clearance	Ask your dealer
Refrigerant (R290) charge, lb	0.19
Maximum capacity keg container (50L), pcs	1
Slew rate the product (up to 35.6 °F) at T= 89.6 °F	10h. 50min.

Overall dimensions

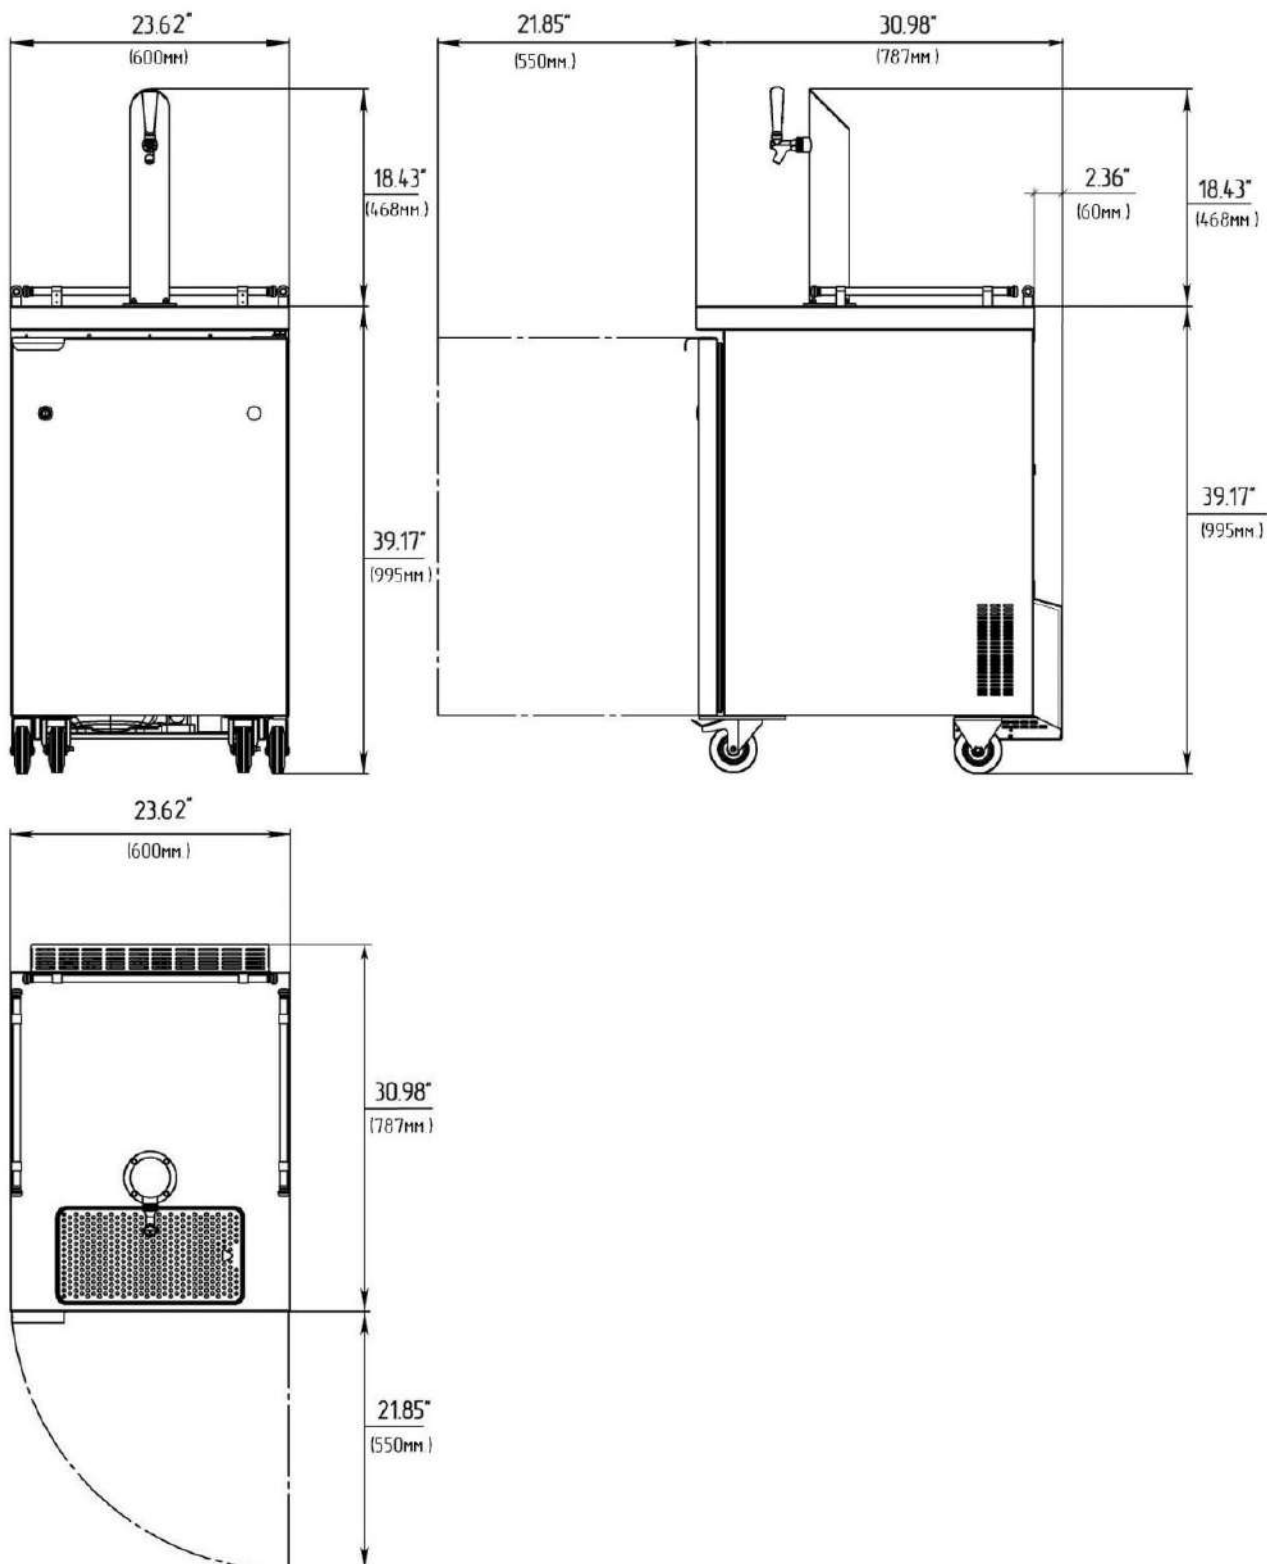


Wiring diagram

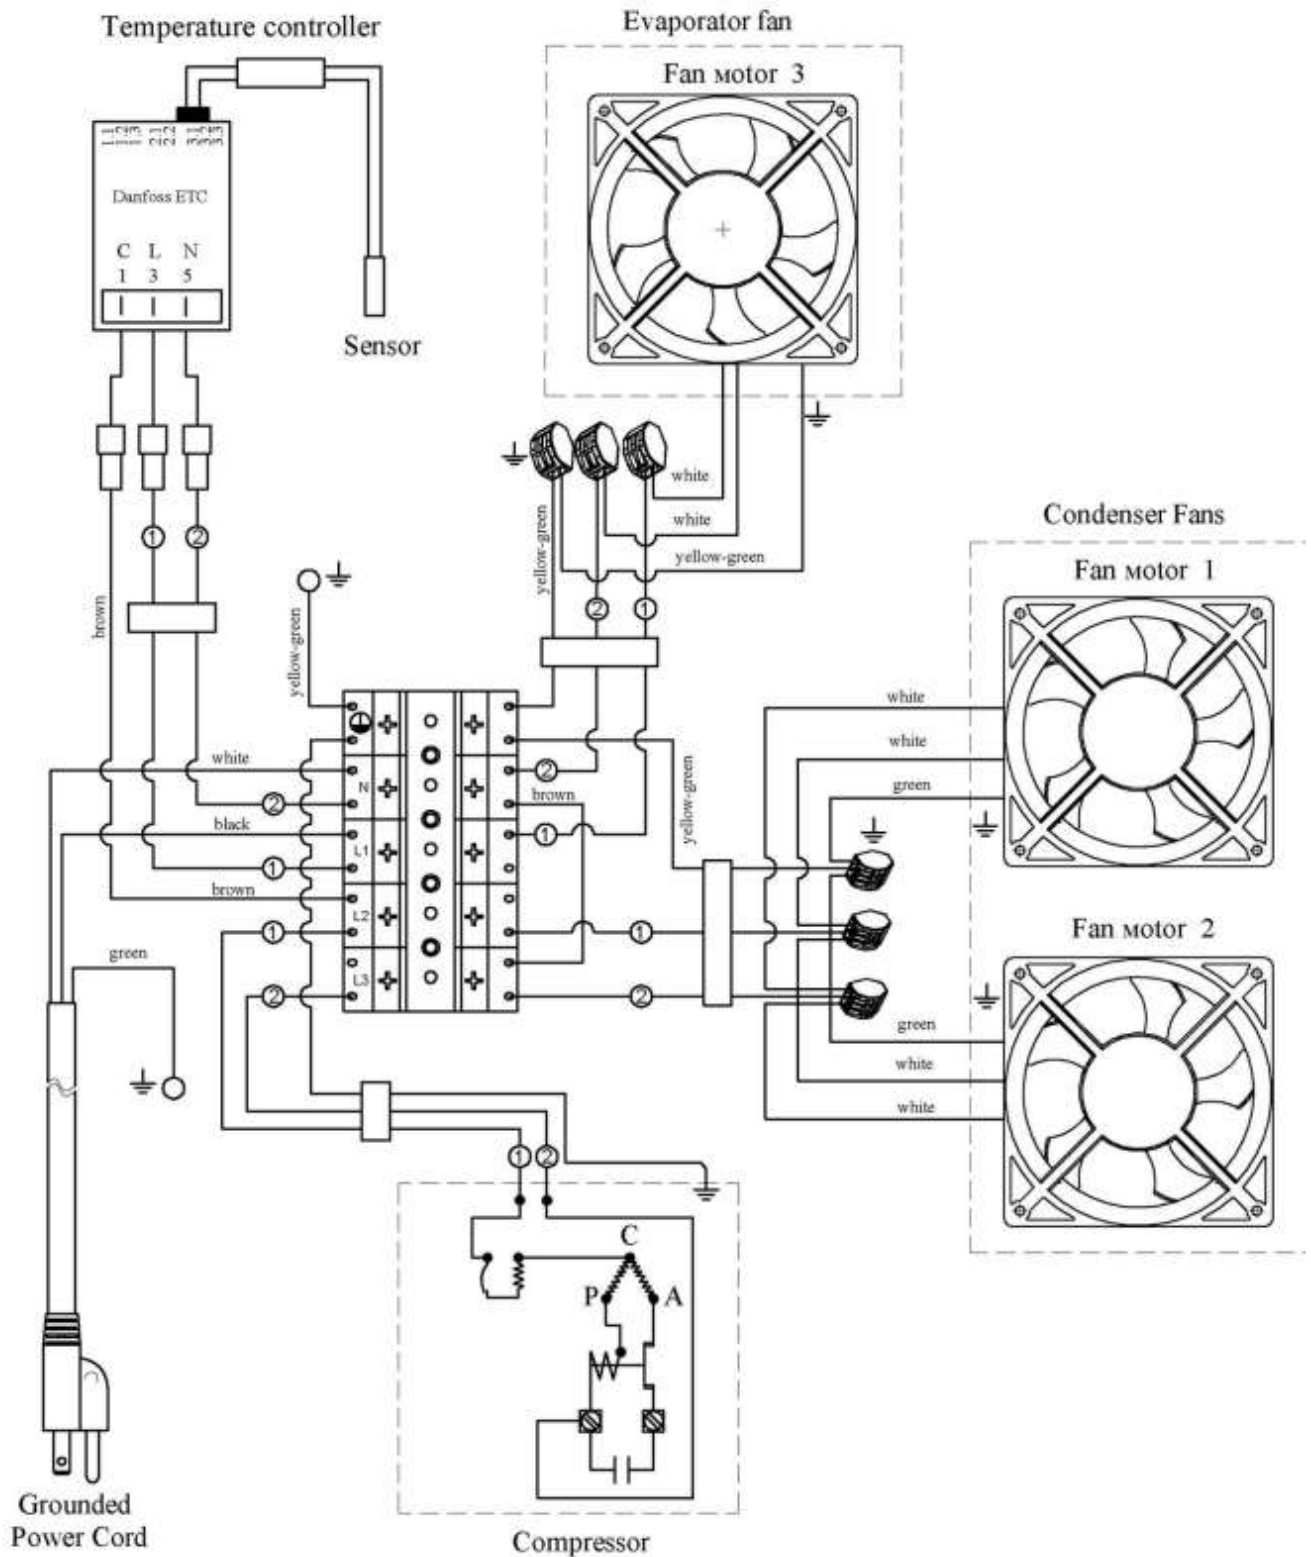

KEGENERATOR

KegMaster Pro

Parts

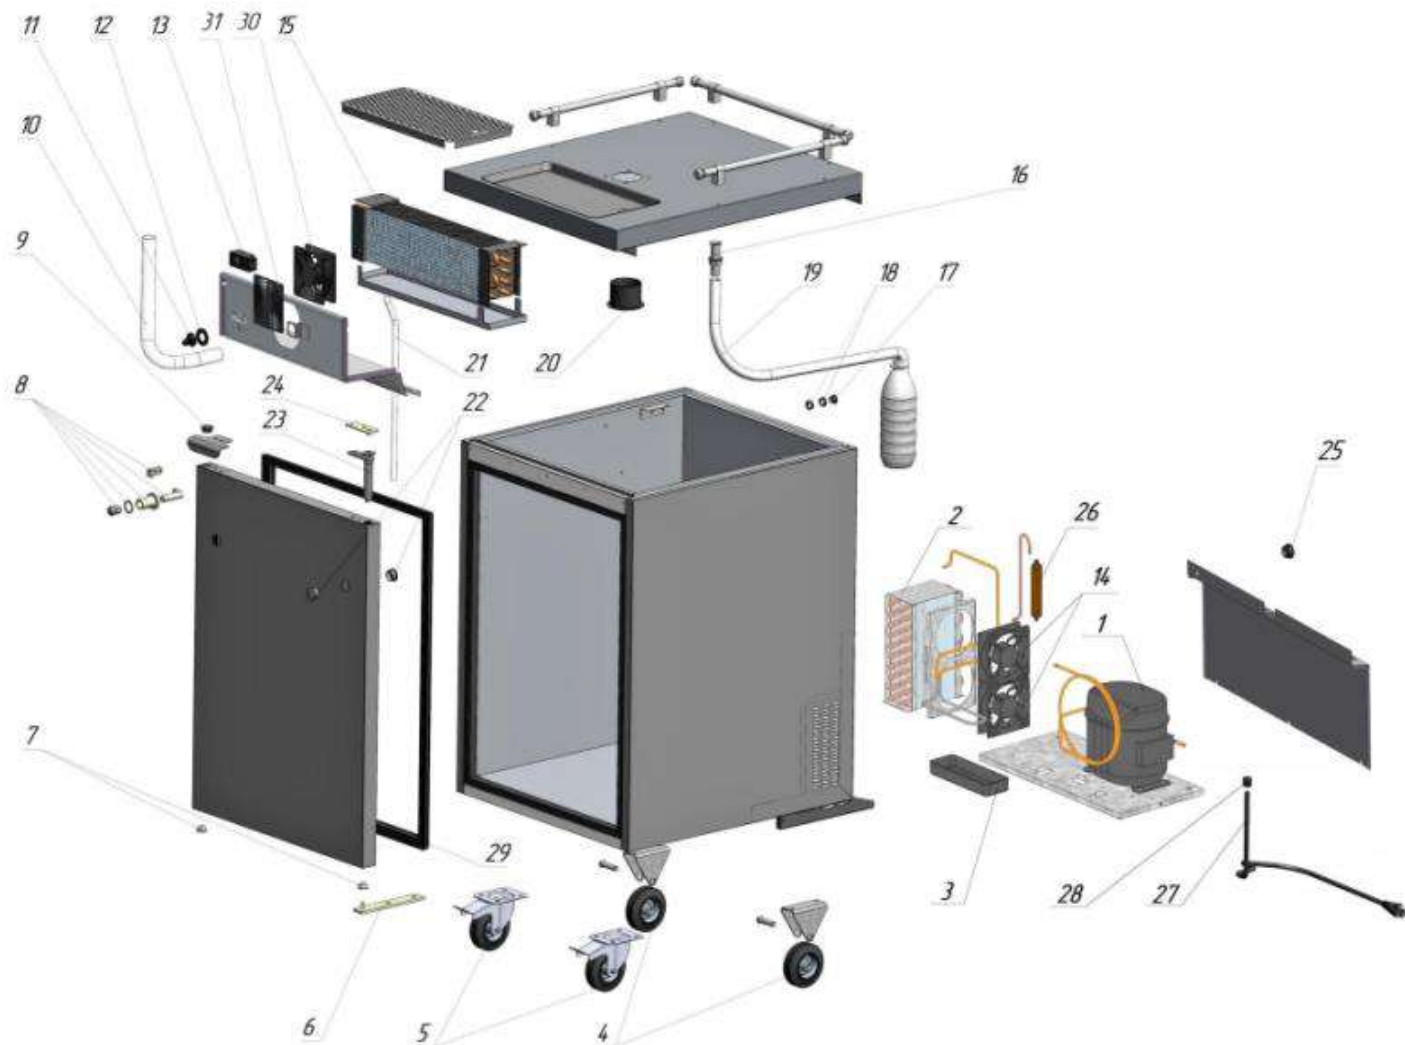

1	Compressor - Cubigel NBC30NR	12	Plate for knob thermostat - cod. 077B7677	23	Hinge - cod. 303.18.500.02
2	AIR Condenser - KARYER B-13147	13	Thermostat - type EETc 11 cod. 080N0012	24	Bracket door - cod. 500.03.300.00
3	Drip tray - cod. 500.06.000.10	14	Condenser Fans - "Sunon", 2 pcs.	25	Cap - type 62MP1000
4	Wheels - type PA/PU 80-32-37-300	15	Evaporator - KARYER B-13148	26	Drier filter - type GR-15
5	Wheels - type PA/PU/Sz/R/80-32-37-108-105x85 (1)-9/80x60-300	16	Drain tube - type 20x75 cod.0001	27	Power cord - SJTOW 16AWG/3 105°
6	Bracket door - type S1401	17	Cap -type 20x75 cod.0001	28	Clamp - type 23MP06N34EZ
7	Nylon bushing - cod. 303.18.500.02	18	Protective ring - type 22MP01060	29	Magnetic gasket - cod. 510.03.200.00
8	Lock - type CHF4401	19	Drain hose - PVC , ID=0,71(in). OD=0,87(in)	30	Evaporator fan - "Sunon"
9	Cap -type - POP-875, cod.3083	20	Bushing - cod. 500.02.000.01	31	Grid - type "Sunon"
10	Air conduit - ID=0.984 in. cod. 076470	21	Drain hose - RAUALCO SK-017-029 RAU-PVC 8766 cod. 049203-001		
11	Knob thermostat - cod. 080N0301	22	Cap - type POP-1000, cod.3086		